

SPECIFICATIONS

RESISTANCE: 300 OHMS ±20%

INDUCTANCE: 45 mH ±20%

OUTPUT: 4.0V P-P MIN. UNDER THE FOLLOWING CONDITIONS:

TEST GEAR: 20P, 60T (XC#181)

SPEED: 350 IPS


AIR GAP: 0.020"

LOAD: 100 KPHM

POLARITY: RED LEAD IS POSITIVE WITH RESPECT TO BLACK LEAD WITH THE APPROACH OF FERROUS METAL

TEMPERATURE: -40°C TO +105°C

CASE AND NUT MATERIAL: 300 SERIES STAINLESS STEEL

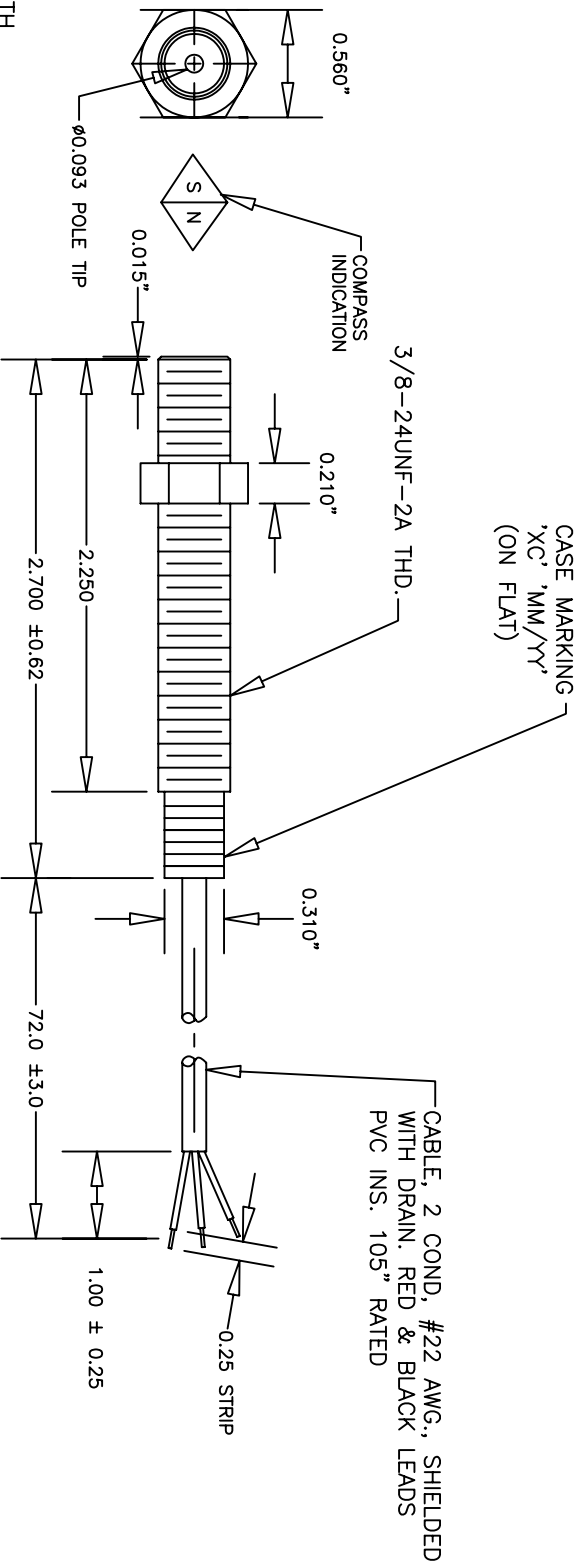

CASE MARKING -
"XC" MM/YY"
(ON FLAT)

CABLE, 2 COND, #22 AWG., SHIELDED WITH DRAIN, RED & BLACK LEADS PVC INS. 105" RATED

UNLESS OTHERWISE SPECIFIED: ALL WIRES 16GA DO NOT SCALE DRAWING PURCHASE ORDER:			DRAWN BY: BK	SCALE: NONE
TITLE: Engine & Generator Controls DSC17200			CHECKED: DATE: 08/14/06	DRAWING NUMBER: DSC17200.DWG
* DISCLAIMER, WE RESERVE THE RIGHT TO CHANGE ANY, OR ALL OF THE INFORMATION ON THIS SCHEMATIC WITHOUT NOTIFICATION		3/8" MAGNETIC PICKUP		SHEET 1 OF 1