

# CP-GCCP1.1 CAT GCCP1.1 Retrofit Kit

## Panel Features:

- Dimensions: 17.75" (w) x 10.50" (h) x 10" (d)
- Black ABS UV Protected Corrosion Proof Cabinet with Corrosion Resistant Hardware. Hinged front access.
- CAT GCCP1.1 controller
- 8 inputs, 8 outputs, 4 analog inputs, GEN sensing, CANBUS, and MODBUS, supports up to four expansion modules
- Front panel configurable with external panel mounted USB port
- Panel mounted and programmed pilot relays for; start, run and auxiliary output
- Supplied 85 amp start solenoid shipped loose
- Color coded engine harness with cannon plug
- Color coded AC harness exits the bottom of the panel
- Panel vibration mounts, 6 foot USB programming cable & electrical schematics included
- Includes a VDO 1/8" NPT Oil Pressure and 3/8" NPT Coolant Sender
- 20amp form C heater/charger disconnect included
- Current Transformers are sold separately




## Additional Panel Options:

- DS16:** Auxiliary Form C Relay 12 Vdc
- DS17:** Auxiliary Form C Relay 24 Vdc
- DS24:** Warning Light (red)
- DS32:** Panel On/Off Toggle Switch
- DS33:** Speed Adjustment Potentiometer
- DS40:** Audible Alarm
- DS45B:** AC Wiring Harness
- DS5:** Voltage Adjustment Potentiometer
- DS67:** Emergency-Stop Operator
- DS20:** 3 Pole Form C Relay 12 Vdc
- DS21:** 3 Pole Form C Relay 24 Vdc
- DS74:** Qty. 1 DS-2157 (8 outputs expansion module)
- DS75:** - Qty. 2 DS-2157's (16 outputs expansion module)

## Additional Module Options:

- DSE2157:** Output Expansion Module (8 Form C contacts)
- DSE2130:** Input Expansion Module (8 inputs)
- DSE890:** 4G Ethernet Web Gateway
- DSE855:** Ethernet Module
- P6-8-DS:** 8 Light Remote Annunciator
- P6-16-DS:** 16 Light Remote Annunciator

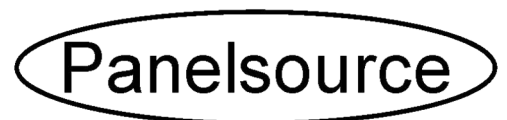

ENGINE & GENERATOR CONTROLS

**FOR A QUOTE OR TO ORDER PLEASE CONTACT US:**

**(800)-383-2078 | (386)-274-2079 | [www.davidsonsales.com](http://www.davidsonsales.com) | [panelsource@davidsonsales.com](mailto:panelsource@davidsonsales.com)**